

# SFBA MP

Double Foil  
Single Bubble

Thermal Insulation for use  
in Roof, Walls & Floors

WATER &  
VAPOUR RESISTANT


QUICK & EASY  
INSTALLATION

IDEAL FOR NEW BUILD  
OR RETROFIT

ROOF  
R 0.97

WALL  
R 1.33

FLOOR  
R 2.33

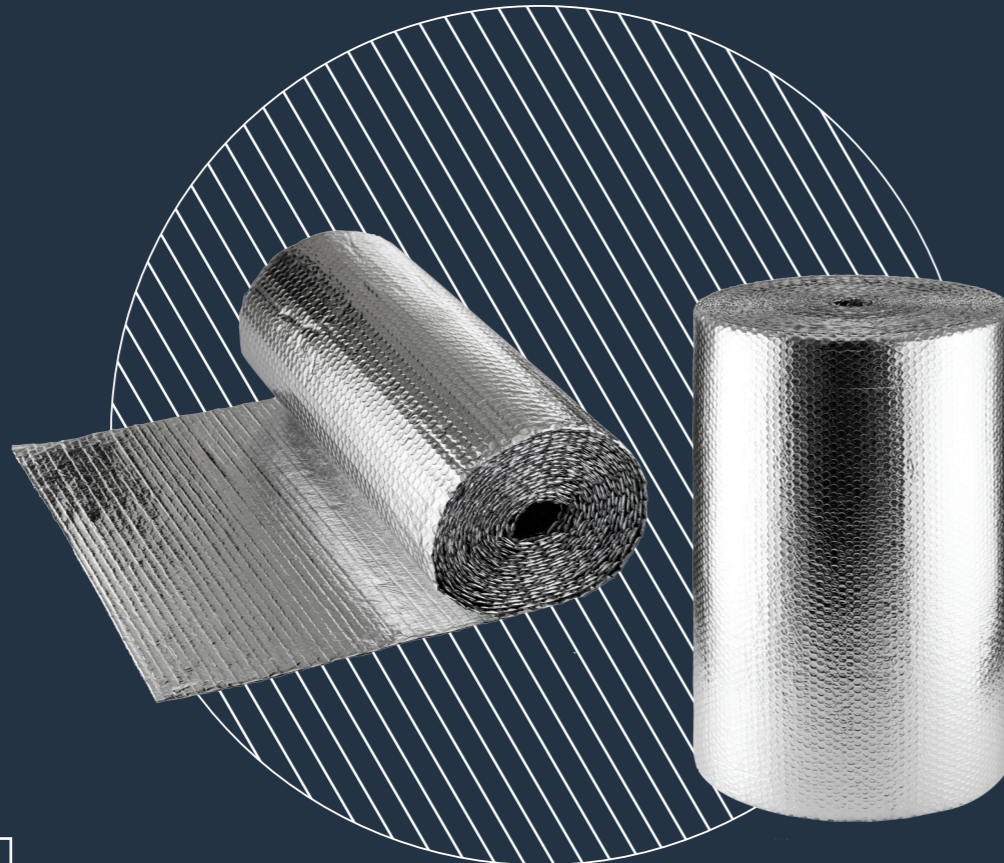

## USAGE



SuperFOIL.co.uk

QUALITY SYSTEM  
MANUFACTURED TO:  
ISO 9001:2008

## KEY FEATURES

- SFBA MP is waterproof and resists the passage of moisture through walls, floors and ceilings.
- SFBA is part of the SuperFOIL range, designed to maximise insulation performance with a quick and easy installation.
- SFBA is a multi-layer air bubble insulation with external layers of aluminium metalized PET. This provides a corrosion resistance for increased lifespan.
- SFBA is a leading bubble foil insulation. It can be used for insulating under floor, in walls, in dry lining such as for cellars

and can also be used in greenhouses and other industrial applications.

- SFBA is a high performance insulation that utilises low emissivity air gaps to maximise the thermal performance.
- SFBA reflects heat, just like a mirror reflects light. SFBA is an ideal radiant barrier for supplementing existing insulation to keep your house warmer in winter and cooler in summer.

## TECHNICAL

### PRODUCT DIMENSIONS

Thickness	3mm
Length	25m
Width	1.5m
Coverage	37.5sqm
Weight	7.5kg

Thickness	3mm
Length	50m
Width	1.5m
Coverage	75sqm
Weight	15kg

Thickness	3mm
Length	50m
Width	0.75m
Coverage	75sqm
Weight	7.5kg

Sizes / Figures are approximate & Subject to change without notice, tolerance +/-5%

### THERMAL PERFORMANCE

Core	N/A
Roof (inc. air spaces)	0.47 R Value
Wall (inc. air spaces)	0.71 R Value
Floor (inc. air spaces)	1.4 R Value
Emittance	0.03

### FIRE PERFORMANCE

Reaction to Fire (Euroclass)	Class E (behind plasterboard)
------------------------------	----------------------------------



SuperFOIL.co.uk