

SFTV1L

General Purpose Thermal, Vapour & Air Tightness Barrier

SFTV Resists the Passage of Moisture Through Walls, Ceilings & Floors

WATER & VAPOUR PROOF


QUICK & EASY INSTALLATION

RADIANT BARRIER

AIR TIGHT

HELPS TO PREVENT MOULD & DAMP

UP TO **R 1.4***

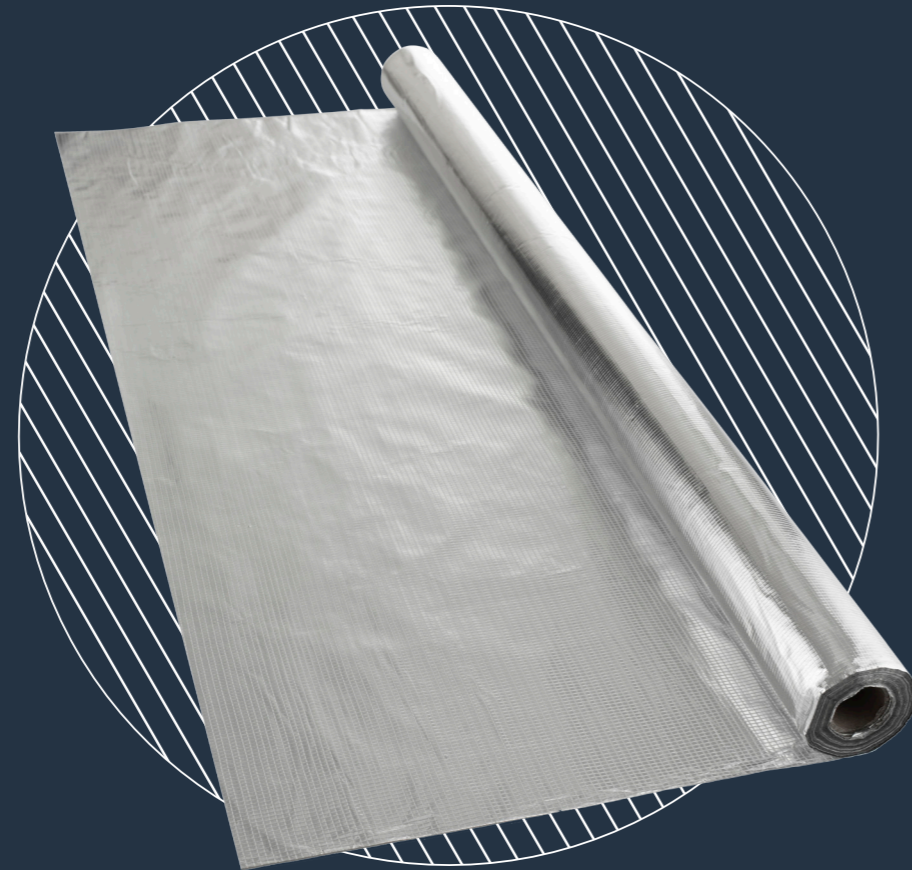

USAGE




SuperFOIL.co.uk

QUALITY SYSTEM
MANUFACTURED TO:
ISO 9001:2008

KEY FEATURES

- SFTV1L is 100% waterproof and resists the passage of moisture through walls, floors and ceilings.
- Installing SFTV1L improves the airtightness of the building.
- SFTV1L is a radiant barrier it can be used to enhance thermal performance U-values in both new build and renovation projects.
- SFTV1L is vapour proof and restricts the passage of warm moist air from within the building from permeating into the structure or the roof.
- SFTV1L is suitable for roof and wall applications.
- SFTV1L helps to prevent mould and damp.
- SFTV1L reduces both convective and radiant heat loss

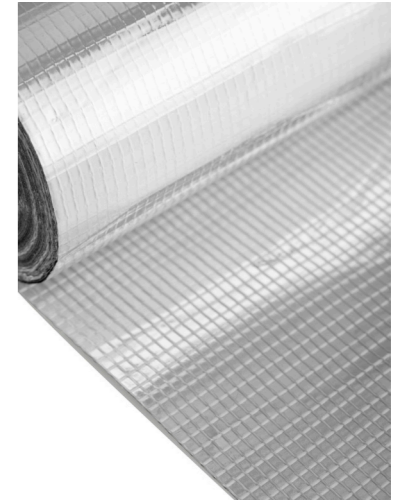

TECHNICAL

PRODUCT DIMENSIONS

Thickness	1mm
Length	20m
Width	1.2m
Coverage	24sqm
Weight	4kg

Sizes / Figures are approximate & Subject to change without notice, tolerance +/- 5%

FIRE PERFORMANCE

Reaction to Fire (Euroclass)	Class E (without plasterboard)
------------------------------	-----------------------------------

THERMAL PERFORMANCE

Core	N/A
Roof (inc. air spaces)	0.47 R Value
Wall (inc. air spaces)	0.71 R Value
Floor (inc. air spaces)	1.4 R Value
Emittance	0.03

ADDITIONAL INFO

Water Vapour Resistance	1200MNs/g
Resistance to water penetration	W1
Flexibility at low temp.	-40c
Tensile Properties - Length (After Ageing)	238/227 N/50mm
Tensile Properties - Width (After Ageing)	111/100 N/50mm



SuperFOIL.co.uk